

Product data sheet

Paving stone roller

VPR 700


Item Nr.

000105001



Dimensions

service weight CECE (standard)		175 [kg]
working width of rolls	(W)	670 [mm]
overall lenght	(L1)	1245 [mm]
machine width	(B)	715 [mm]
overall height	(H1)	950 [mm]
shipping dimension lenght	(L2)	[mm]
shipping dimension height	(H2)	[mm]
lenght	(L3)	715 [mm]
roll diameter	(D)	96 [mm]
roll quantity		4

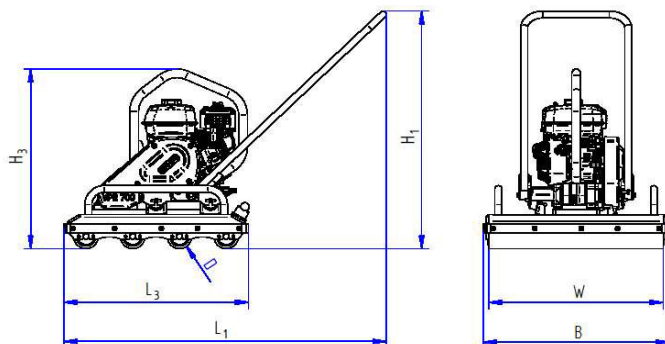

VPR 450 / 700

Performance

centrifugal force	14 [kN]
exiter frequency	100 [Hz]

Control displays

☐ hour meter standard

Engine data

engine manufacturer	Honda	type of combustion	4-stroke petrol
type of engine	GX 160	type of starter	Manual start
performance (ISO 3046-1)	3,6 [kW]	fuel consumption. (80% load)	1,1 [L]
output at service r.p.m.	2,7 [kW]	fuel tank capacity	3,1 [L]
service r.p.m. of engine	3200 [1/min]	type of vibration	V-belt
automatic switch off	☐		

Emission

sound power level Lwa	105 [dB (A)]	EU emission certificate	EU Stage V
hand-arm vibration	14,5 [m/s ²]	US emission certificate	EPA 3

Accessories

hour meter	[Item Nr. 000194105
service kit	[Item Nr. 041001434